



Workhorse Mariner

1200, 600, 300, 150 kHz ADCP

Convenient Hull-mounted ADCP for Coastal Vessel Applications

Teledyne RD Instruments' **Workhorse Mariner** Acoustic Doppler Current Profiler (ADCP) has become the instrument of choice for researchers and commercial surveyors working in coastal waters. The Mariner offers all of the benefits of Teledyne RDI's traditional ADCP products in a compact package designed specifically for coastal hull-mount applications.




The Workhorse Mariner offers:

- **Convenience:** *By installing the Mariner directly in the vessel's hull, the ADCP is always ready to operate—no need for cumbersome mounting tools and hardware, and the unit is safely protected from external elements.*
- **Precision data:** *Teledyne RDI's patented Broadband signal processing delivers very low-noise data, resulting in unparalleled fine track resolution.*
- **A four-beam solution:** *Teledyne RDI's patented 4 beam design improves data reliability by providing a redundant data source in the case of a blocked or damaged beam; improves data quality by delivering an independent measure known as error velocity; and improves data accuracy by reducing variance in your data.*




**TELEDYNE
RD INSTRUMENTS**

A Teledyne Technologies Company

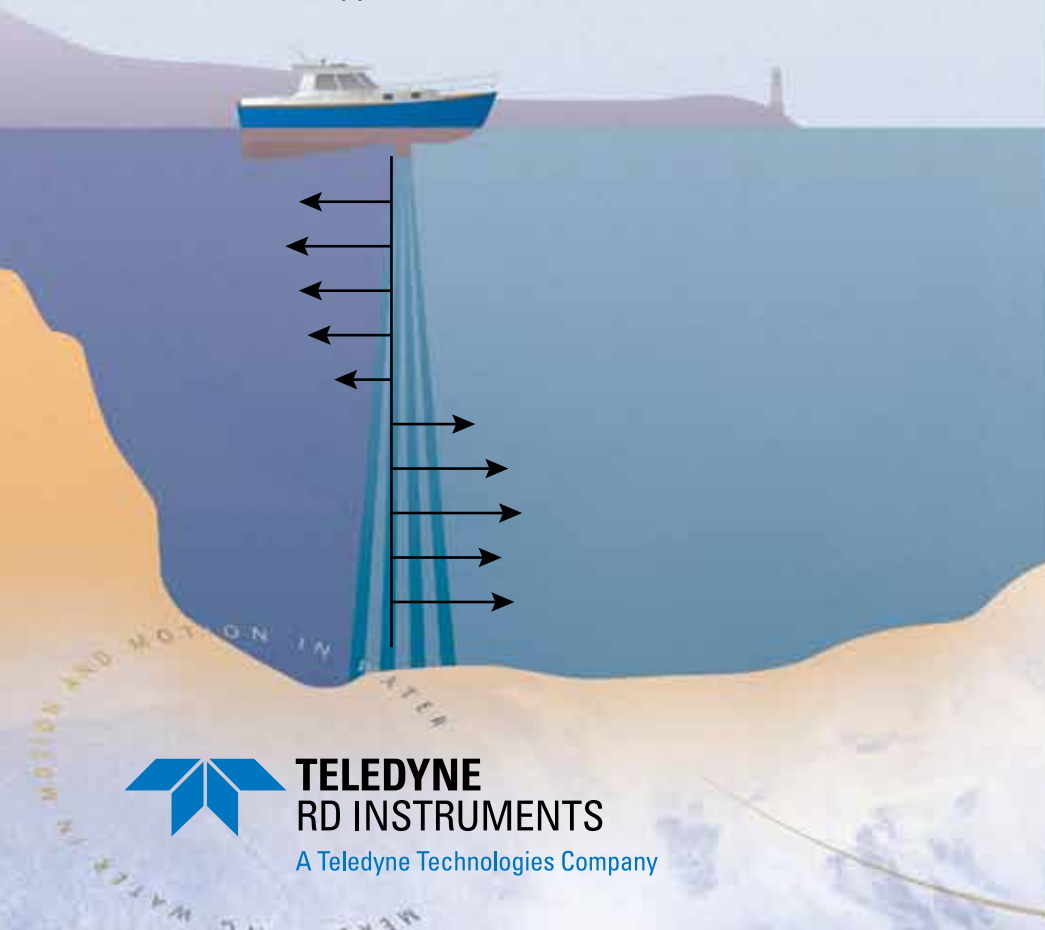

Workhorse Mariner

1200, 600, 300, 150 kHz ADCP



Technical Specifications

Water Profiling								
Depth Cell Size ¹	Typical Range 15m ² 1200kHz		Typical Range 55m ² 600kHz		Typical Range 135m ² 300kHz		Typical Range 275m ² 150kHz	
Vertical Resolution (m)	Range ³ (m)	Std. Dev. ⁴ (cm/s)	Range ³ (m)	Std. Dev. ⁴ (cm/s)	Range ³ (m)	Std. Dev. ⁴ (cm/s)	Range ³ (m)	Std. Dev. ⁴ (cm/s)
0.25	11–14	12.9						
0.5	13–16	6.1	52	12.9	see note ¹			
1	14–18	3.0	57	6.1	84–118	12.8		
2	15–20 ²	2.0	62	3.0	93–128	6.1		
4	see note ¹		67 ²	2.0	116–141	3.0	275	14.0
8					116–155 ²	2.0	300	7.0

¹User's choice of depth cell size is not limited to the typical values specified.

²Longer ranges available.

³Profiling range based on temperature values at 5°C and 20°C, salinity = 35ppt.

⁴BroadBand mode single-ping standard deviation (Std. Dev.).

Long Range Mode

	Range (m)	Depth Cell Size (m)	Std. Dev. (cm/s)
1200kHz	20	2	3.4
600kHz	70	4	3.6
300kHz	165	8	3.6
150kHz	323.6	16	3.6

Bottom Track Parameters

The Workhorse Mariner ADCP includes bottom-tracking capability to measure the ADCP speed and direction over ground.

System Freq.	1200	600	300	150
Max. Alt. (m)	30	100	260	500
Min. Alt. (m)	0.8	1.4	2.0	2.6
Range Accuracy = ±2% actual range*				

* Excludes errors introduced by changes in speed of sound profile, by tilting of transducer, and by slope of bottom.

Profile Parameters

Velocity accuracy:

- **1200, 600:** 0.3% of the water velocity relative to the ADCP ±0.3cm/s
- **300:** 0.5% of the water velocity relative to the ADCP ±0.5cm/s
- **150:** 1% of the water velocity relative to the ADCP ±0.5cm/s

Velocity resolution: 0.1cm/s

Velocity range: ±5m/s (default)
±20m/s (maximum)

Number of depth cells: 1–255

Ping rate: 2Hz (typical)

Transducer and Hardware

Beam angle: 20°

Configuration: 4-beam, convex

Tilt sensor range: ±15°

Transducer face material: Polyurethane

Depth rating: 200m standard

Internal memory: Card not included

Communications: Output format is

RS-232. ASCII or binary output at

1200–115,400 baud.

Echo Intensity Profile

Vertical resolution: Depth cell size

Dynamic range: 80dB

Precision: ±1.5dB

Environmental

Operating temperature: -5° to 45°C

Storage temperature*: -30° to 60°C

Weight in air: 9.1kg

Weight in water: 2.7kg

* Without batteries

 **TELEDYNE**
RD INSTRUMENTS
A Teledyne Technologies Company
www.rdinstruments.com



Free 24/7 emergency support

Teledyne RD Instruments

14020 Stowe Drive, Poway, CA 92064 USA

Tel. +1-858-842-2600 • Fax +1-858-842-2822 • E-mail: rdsales@teledyne.com

Les Nertieres 5 Avenue Hector Pintus 06610 La Gaude France

Tel. +33-49-211-0930 • Fax +33-49-211-0931 • E-mail: rdie@teledyne.com

